



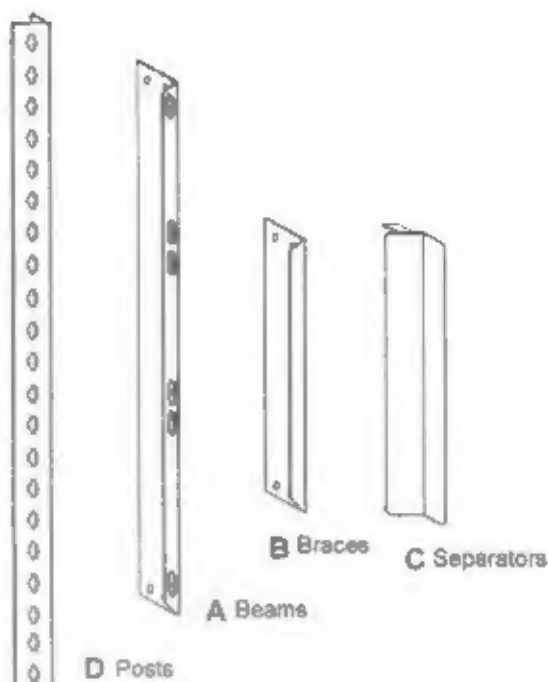

Edsal Rivet Lock Record Storage Rack System

For use with standard 12" W x 15" D x 10" H record storage boxes - not included

v1.00

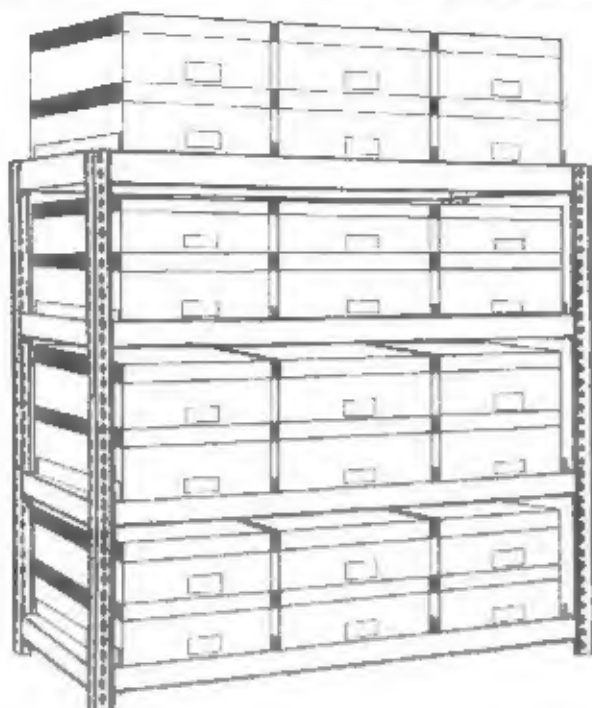

RR 31318

Dimensions: 44" W x 16 15/16" D x 60" H

Levels: 3

Capacity: 18 Storage Boxes

Parts List

Ref	Description	Qty	Dimension	Part #
A	Beams	8	43"	6138
B	Braces	8	15 5/8"	7103
C	Separators	18	16"	9849
D	Posts	4	60"	RLSU5TN

RR 41324

Dimensions: 44" W x 16 15/16" D x 84" H

Levels: 4

Capacity: 24 Storage Boxes

Parts List

Ref	Description	Qty	Dimension	Part #
A	Beams	8	43"	6138
B	Braces	8	15 5/8"	7103
C	Separators	24	16"	9849
D	Posts	4	84"	RLSU7TN

RR 32336

Dimensions: 44" W x 32 7/8" D x 60" H

Levels: 3

Capacity: 36 Storage Boxes

Parts List

Ref	Description	Qty	Dimension	Part #
A	Beams	8	43"	6138
B	Braces	6	32 1/8"	7104
C	Separators	36	32 1/2"	9848
D	Posts	4	60"	RLSU5TN

RR 42348

Dimensions: 44" W x 32 7/8" D x 84" H

Levels: 4

Capacity: 48 Storage Boxes

Parts List

Ref	Description	Qty	Dimension	Part #
A	Beams	8	43"	6138
B	Braces	6	32 1/8"	7104
C	Separators	24	32 1/2"	9848
D	Posts	4	84"	RLSU7TN

General Instructions


Assembly is done with the rivet heads of Beams and Braces fitting into the key hole slots of the Posts. The tabs of the Separators fit into the rectangular slots on the top of the Beams to support the storage boxes. A rubber mallet may be used on the beams and braces to seat the rivets properly. A hammer can also be used, providing one uses a cloth or block of wood between the hammer head and the parts to prevent damage.

Safety Instructions

These units should be placed on a level surface. Failure to do so can result in poor performance or create a possible safety hazard. This unit should be securely anchored to a wall or floor with suitable fasteners, which are not included. Do not use this product for anything other than the manufacturers intended purpose. Do not stand on any part of the unit, or use it as a ladder. Do not overload. Evenly distribute the weight on each level and always keep the heavier loads near the bottom. Make certain that all the record storage cartons are properly centered on the separators. Use care when working with metal parts.

Step 1 - Side Assembly

Fig. 2



Assemble one Brace (B) to two posts by inserting the rivets into bottom 2nd and 3rd slots in each of the Posts (D). Tap down Brace (B) with a mallet or hammer. See Fig. 1.

Attach another Brace (B) to the top two slots of the Posts (D). Tap down Brace (B) with a mallet or hammer. See Fig. 2.

Fig. 1




Fig. 3

Attach the center Brace (B), or Braces (depending on whether you have a 3 or 4 level unit). Space them equally, as in Fig. 3. Tap down Brace (B) with a mallet or hammer.

Repeat previous steps to assemble the other side component.

RR31318
RR32336
3 Level
Units

RR41324
RR42348
4 Level
Units





Side View



Step 2 - Front & Back Assembly

Connect the two side components with the Beams (A). Insert them in the identical slot locations as used on the side components. See Fig. 4. Tap down Beams (A) with a mallet or hammer.


Fig. 4

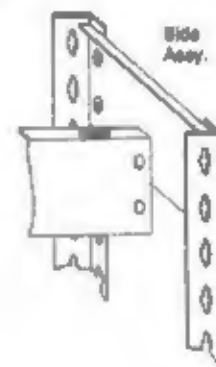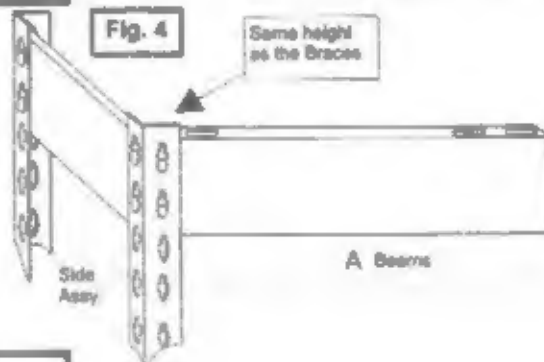

Step 3 - Final Assembly

The Separators (C) are inserted into the top of the Beams (A), as in Fig. 5.

Fig. 5

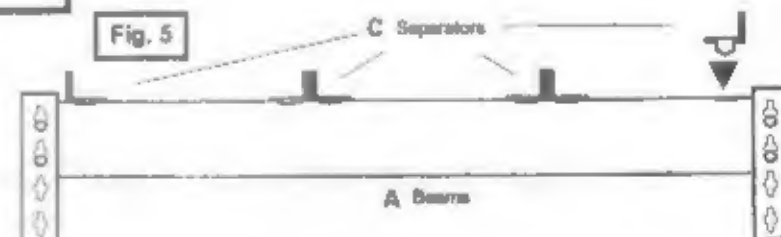

Should you have any comments or problems with the assembly of this unit please contact Edsal Manufacturing by calling (773) 254-0600 and requesting Customer Service.
Edsal Manufacturing has made every effort to assure that all units are complete and undamaged. However, should your unit have damaged or missing parts, replacements can be obtained directly from Edsal Manufacturing by calling (773) 254-0600 and asking for Customer Service.

To obtain replacement parts, please provide the following information:
- Model # - Part # & Description - Location Purchased - Date Purchased



Edsal Manufacturing Company
4400 South Packers Ave.
Chicago, IL 60609